

General Description

Cremat's CR-111 is a single channel charge sensitive preamplifier module intended for use with various types of radiation detectors. The CR-111 is one of a series of three charge sensitive preamplifiers offered by Cremat, which differ from each other most notably by their gain. A guide to selecting the best charge sensitive preamplifier for your application can be found at our web site: <http://cremat.com>. As with all Cremat's preamplifier modules, the CR-111 is small (less than one square inch in area), allowing for compact multichannel detection systems to be constructed using a modular design.

Detector coupling

The CR-111 can be used either in a direct coupled (DC) mode, or an AC coupled mode. If the detector current exceeds 100 nA, it is recommended that an AC coupled mode be used to prevent the resulting DC offset of the preamplifier output from saturating. Low frequency detector current (e.g. 'dark' current, or leakage current) produces an offset in the preamplifier output voltage at a rate of 20 mV per nA. The use of AC coupling also is useful in improving the counting rate capability of the preamplifier. A schematic diagram of an AC-coupled charge sensitive preamplifier detection circuit can be found at http://cremat.com/CSP_app_notes.htm




Figure 1

Package Specifications

The CR-111 circuit is contacted via an 8-pin SIP connection (0.100" spacing). Leads are 0.020 inches wide. Pin 1 is marked with a white dot for identification.

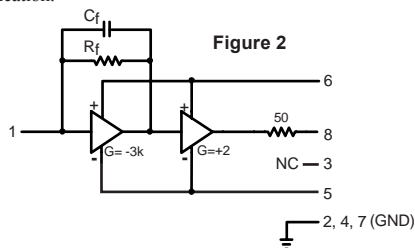


Figure 2

Equivalent circuit diagram

The figure above shows a simplified equivalent circuit diagram of the CR-111, which is a two stage amplifier. The first stage is high gain, and the second stage is low gain with an emphasis on supplying sufficient output current to drive a terminated coaxial cable. Pin numbers corresponding with the CR-111 preamplifier are shown. R_f (10 MΩ) and C_f (15 pF) are the feedback resistor and capacitor respectively.

Output waveform


Charge sensitive preamplifiers are used when radiation is detected as a series of pulses, resulting in brief bursts of current flowing into or out of the preamplifier input. Depending on the type of detector, this burst of current may be very brief (<1 ns) or as long as a few μs. For an idealized detection current pulse taking the form of a delta function, the detected charge (time integral of the input current) will ideally take the form of a step function.

The output waveform of an actual charge sensitive preamplifier will of course have a non-zero rise time: for the CR-111 this figure is approximately 3 ns. Furthermore, capacitance at the preamplifier input (i.e. detector capacitance) will further slow the rise time at a rate of 0.25 ns / pF.

Keep in mind the output rise time will also be limited by the speed of the detector. For example, the detection current pulse from a CsI(Tl)/PMT

scintillation detector has a duration of approximately a couple μs, so the expected rise time of the charge sensitive preamplifier output will be at least that long.

The output waveform of the CR-111 using a capacitively-coupled fast square wave pulser at the input is shown below to the left. At long time domains, the output decays due to the discharge of the feedback capacitor through the feedback resistor, with an RC time constant of 150 μs. This decay of the output waveform is shown below, to the right.

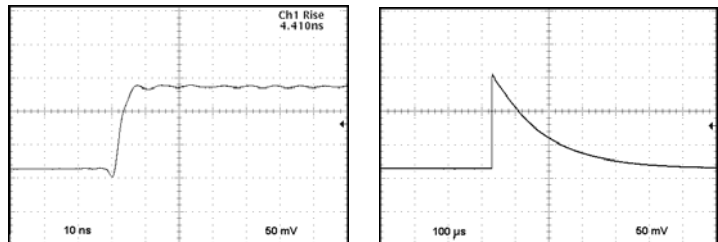

Cremat, Inc.
45 Union St.
Watertown, MA 02472
(617) 527-6590
FAX: (617) 527-2849
<http://cremat.com>

Specifications

Assume temp = 20 °C, $V_s = \pm 6.1V$, unloaded output

	CR-111	units
Preamplification channels	1	
Equivalent noise charge (ENC)*		
ENC RMS	630	electrons
Equivalent noise in silicon	0.1	femtoCoul.
	6	keV (FWHM)
ENC slope	3.7	elect. RMS /pF
Gain	0.13	volts /pC
Rise time **	3	ns
Decay time constant	150	μs
Unsaturated output swing	-3 to +3	volts
Maximum charge detectable per event	1.3×10^8	electrons
Power supply voltage (V_s)		
maximum	$V_s = \pm 13$	volts
minimum	$V_s = \pm 6$	volts
Power supply current (pos)	7.5	mA
(neg)	3.5	mA
Power dissipation	70***	mW
Operating temperature	-40 to +85	°C
Output offset	+0.2 to -0.2	volts
Output impedance	50	ohms

* Measured with input unconnected, using Gaussian shaping amplifier with time constant = 1 μs. With a detector attached to the input, noise from the detector capacitance, leakage current, and dielectric losses will add to this figure.

** Pulse rise time (defined as the time to attain 90% of maximum value) has a linear relationship with input capacitance. Value cited in the table assumes zero added input capacitance. To calculate pulse rise time for practical situations, use the equation: $t_r = 0.11 C_d + 3$ ns, where t_r is the pulse rise time in ns, and C_d is the added capacitance (e.g. detector capacitance) in pF.